

Envirofelt CO

Technical Data & Installation Guidelines



TenCate Polyfelt® Envirofelt CO


TenCate Polyfelt® Envirofelt CO is made from 100% natural, biodegradable coconut fibres (coir). The biodegradation process of the coir adds organic nutrients to the soil, thus acting as fertilizer. Envirofelt CO has the necessary strength to hold soil in place, thereby preventing surface erosion.

Technical Data

Properties <small>[Standard]</small>	Unit	CO 400
Type of product	-	Woven net
Raw material	-	100 % natural coir (coconut fibres)
Identification Properties		
Thickness <small>[EN ISO 9863-1]</small>	mm	7
Mass per unit area <small>[EN ISO 9864]</small>	g/m ²	400
Number of yarns	MD	30
	CD	32
Proportion of open area	%	65
Mechanical Properties		
Tensile strength	MD	kN/m
	CD	kN/m
Elongation	MD	%
	CD	%
Forms of Supply		
Width	m	2.0
Length	m	25
Area	m ²	50
Bundle weight	kg	20
Bundles / package	no	5

The values given are indicative and correspond to average results obtained in our laboratories and in testing institutes. The right is reserved to make changes without notice.

TenCate Polyfelt® Envirofelt CO - Installation Guidelines

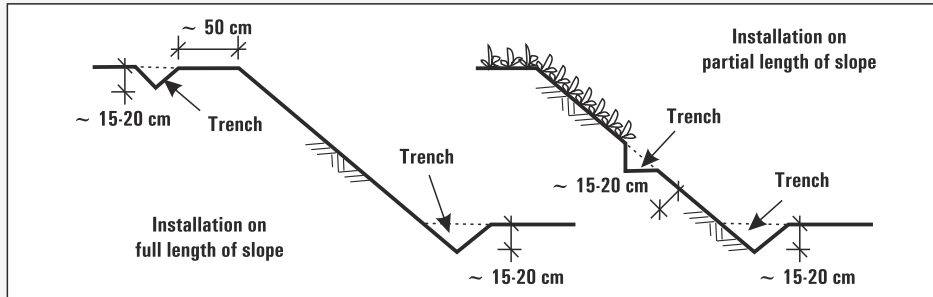



1. The subgrade shall be prepared in accordance with the designer's specification. It shall be smoothly compacted and free from stones, roots or other obstacles.

2. Apply seeds by hand, by hydro-seeding or by other suitable method.

3. Place the erosion-protection mat in the trench and unroll down the slope.

4. Fix the erosion-protection mat according to the sketch, depending on the slope angle. Overlap adjacent panels shall be approx. 5 cm. Pins shall be made from 8 mm steel rods, U-shaped and 30 cm long.

5. Backfill the anchor trench by hand or by excavator, and compact.

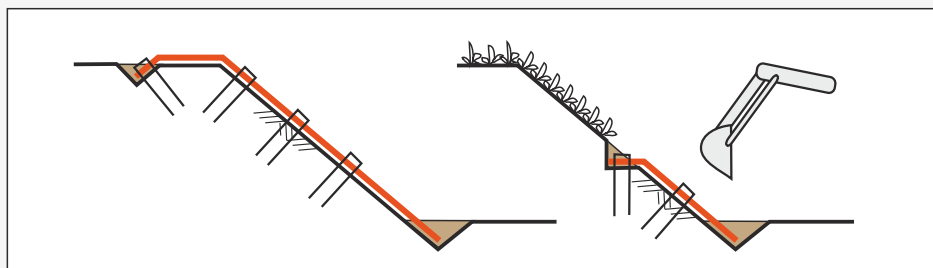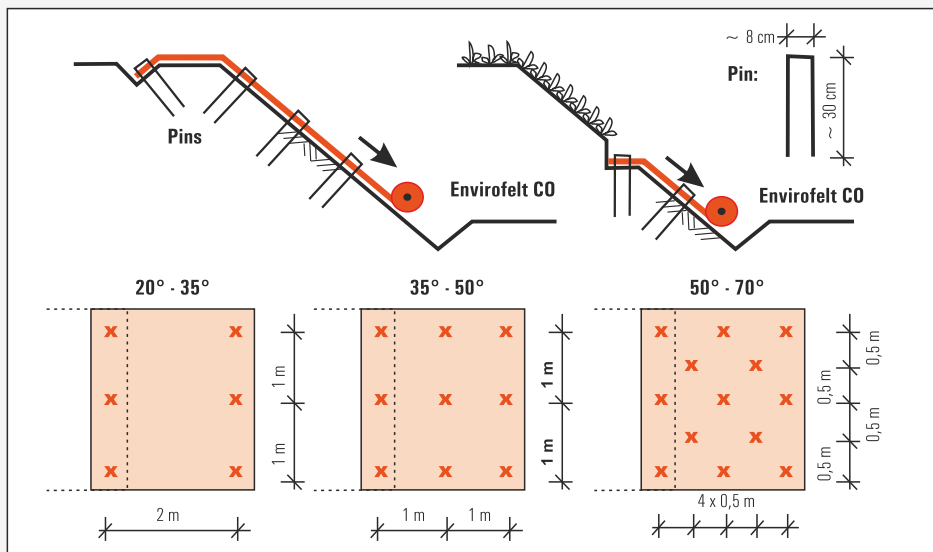

The information given in this brochure is to the best of our knowledge true and correct, however new research results and practical experience can make revisions necessary. No guarantee or liability can be drawn from the information mentioned herein. Furthermore, it is not our intention to violate any patents or licences.

TENCATE GEOSYNTHETICS AUSTRIA GMBH

Schachermayerstr. 18 Tel. +43 732 6983 0, Fax +43 732 6983 5353
A-4021 Linz, Austria service.at@tencate.com, www.tencategeosynthetics.com

BeNeLux Tel. +31 546 544 811 service.nl@tencate.com
Central Eastern Europe Tel. +43 732 6983 0 service.at@tencate.com
Czech Republic Tel. +420 2 2425 1843 service.cz@tencate.com
France / Africa Fax +33 1 34 23 53 48 service.fr@tencate.com
Germany Tel. +49 6074 3751 61 service.de@tencate.com
Italy Tel. +39 0362 34 58 11 service.it@tencate.com
Near Middle East Tel. +971 4810 3295 service.nme@tencate.com

Poland Tel. +48 12 268 8375 service.pl@tencate.com
Russia / CIS Tel. +43 732 6983 0 service.ru@tencate.com
Scandinavia / Baltics Tel. +31 546 544 811 geonordic@tencate.com
Spain / Portugal Tel. +34 607 499 962 service.es@tencate.com
Turkey Tel. +43 732 6983 0 service.tr@tencate.com
UK / Ireland Tel. +44 1952 588 066 service.uk@tencate.com

